


Voice Location ID Board Programming Instructions

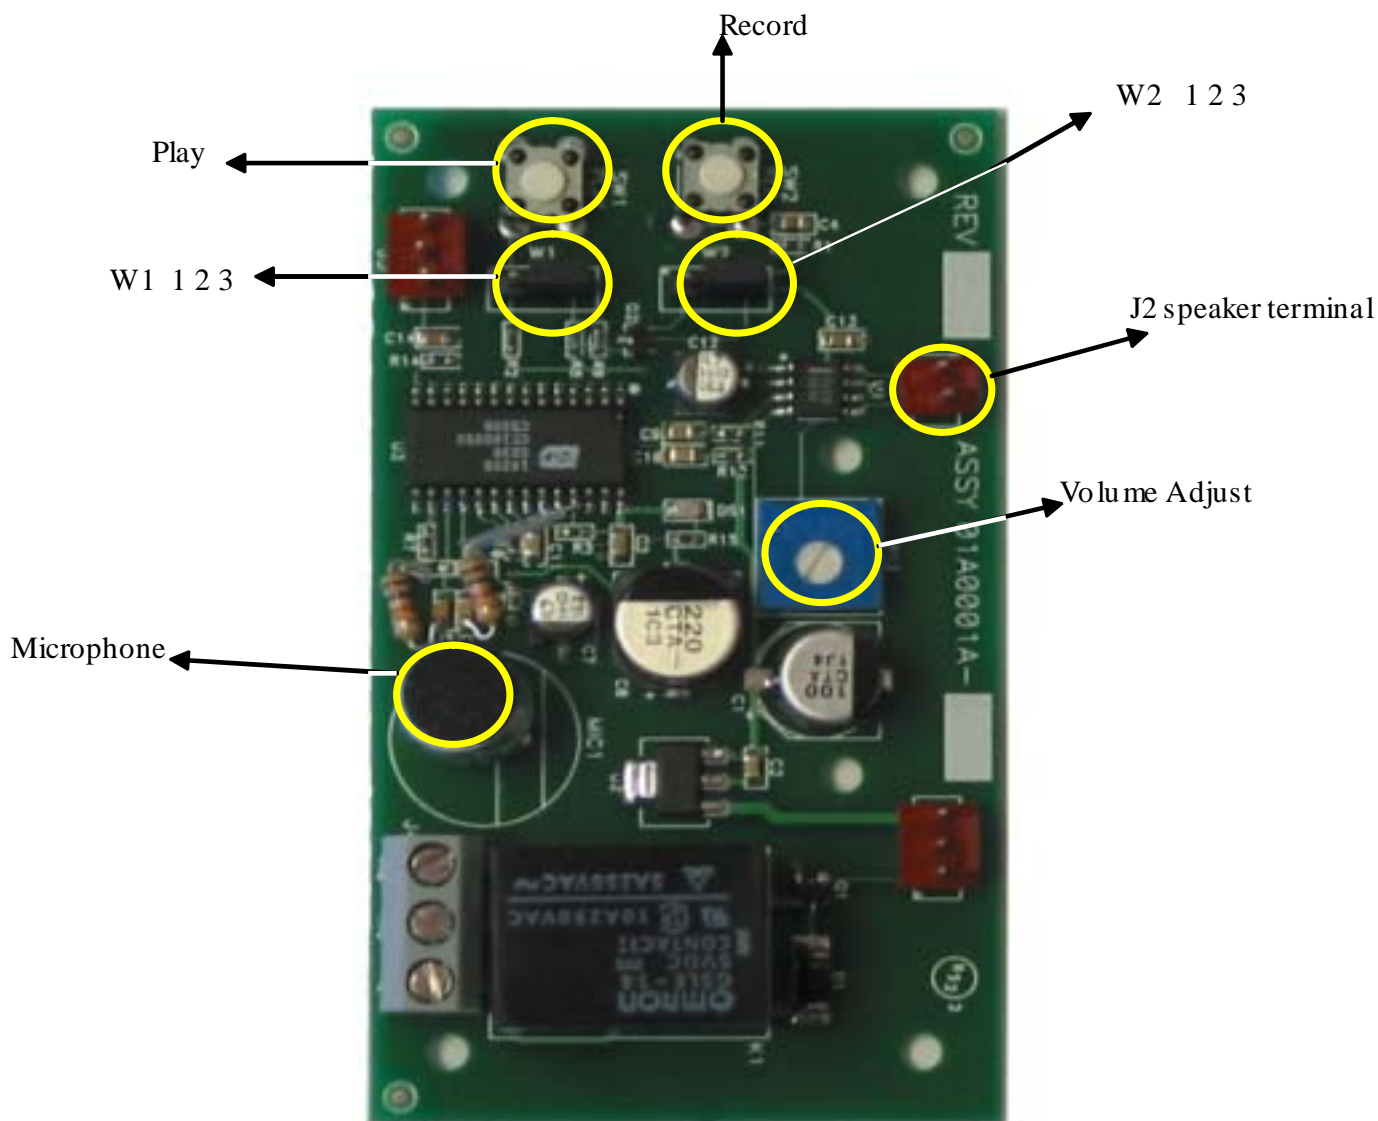

1. Make sure the jumper on W1 is on pins 1 and 2. Make sure the jumper on W2 is on pins 2 and 3.
2. Disconnect the speaker on the main universal board and connect it to J2 on the voice module.
3. Press and hold the “record button”, speak in to the microphone. Adjust the volume (R13) as needed.
4. Press the “play” button the play message.
5. Reconnect the connector to the speaker when finished.
6. Once recording is complete, move jumper on W1 to pins 2 and 3
7. Voice locator message will play automatically when the emergency call is answered
8. Called party can press 6 anytime during the call to re-play the voice locator message.