

Miniguard HF-2 Weather Mount

Telephone Entry / Auto-dialer

Description:


The HF-2 is a telephone entry unit that strictly autodial. When the button is pushed, the unit begins dialing. It continues dialing programmed numbers until it is answered. The person who answers the call then takes control of the relays. Those relays are then used to remotely control entrances, lights, cameras, etc.

Features:

- ▲ Built in LED lighting and rain gutters for increased weather resistance
- ▲ Automatically dials a programmed number up to 16-digits. The HF-2 can be programmed to autodial up to 10 numbers for added security.
- ▲ Operates on 12V AC/DC
- ▲ Two output relays for control of one entrance and one additional feature of choice (camera, extra door, etc)
- ▲ Alarm shunt relay aids alarm management.
- ▲ Remotely programmable from any touch-tone phone.
- ▲ Programmable site ID.
- ▲ Non-corroding #316 Stainless Steel weather resistant enclosure with tamper resistant security screws.
- ▲ Slim design for easy mounting.
- ▲ Optional Lighted hood provides increased protection in exposed areas.

Applications:

- ▲ Allows entrance for anyone whom does not normally gain entrance or does not have a key.
- ▲ Allows contact for offices after hours.
- ▲ Use to call security after hours for employee escort

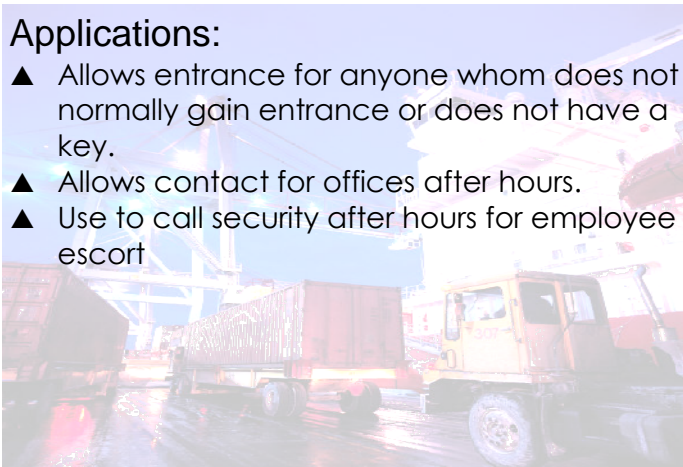

Operation:

When the button is pushed, the HF-2 calls a programmed telephone number. If the called number is busy or does not answer, the HF-2 will hang up and dial the next number and so on up to 10 numbers. If all the back up numbers are busy or do not answer, the HF-2 will start at the first number.

When the call is answered, the resident has the choice to grant entry with their keypad or deny entry by hanging up. If the second relay is connected the resident can also control that device at this time with their keypad.

The HF-2 can be programmed with a unique site ID. The HF-2 will transmit the code as tones when the called party presses a key on their telephone. This allows identification even if the caller is unable to speak. A Trigon Decoder III can be employed to automatically interpret the Site ID and display information regarding that site.

Miniguard HF-2 Weather Mount - Auto-dialer / Telephone Entry



PH: (951) 371-1730 • FAX (951) 371-2592 • 255

Glider Circle, Corona CA 92880

Miniguard HF-2 Weather Mount

Telephone Entry / Auto-dialer

Specifications:

- ▲ **Design** - Hands-free auto-dial telephone
- ▲ **Capacity** - Up to 10 numbers, each up to 16 digits in length.
- ▲ **Site ID** - Programmable site ID
- ▲ **Programming** - Remote via touch tone telephone.
- ▲ **Power** - 110V/12VAC, 40A, Class 2 transformer included.
- ▲ **Output Rating:** Power Relays: 5 amps @ 12 VDC or 1 amp @110VAC. Alarm Shunt Relay 250ma @ 12VAC.
- ▲ **Output Duration** - Programmable, momentary up to 45 seconds.
- ▲ **Inputs** - Push-to-exit button or postal lock box.
- ▲ **Telephone Line** - Standard touch tone or rotary. Compatible with most PBX analog ports.
- ▲ **Mounting** - Surface with pedestal mounts available.
- ▲ **Construction:**
 - ⇒ Non-corroding #316 Stainless Steel weather resistant enclosure with back box and tamper resistant security screws.
- ▲ **Operating Temperature:** -5°F to +120°F

Mounting:

Accessories / Options:


- ▲ **Color Camera** - High resolution camera that operated in low light with 470 TVL clarity.
- ▲ **Line Filter** - Suppresses RFI/EMI from input power line.
- ▲ **Postal Lock Box** - Allows keyed access for postal carrier.
- ▲ **Decoder III** - Desktop device that displays site ID when the unit calls that station. Allows easy management of multiple units for security purposes.

Fiber Optic Compatible:

International Fiber Systems model #'s:

TT2010, TR2010, TT2010WDM, TR2010WDM
TT2030, TR2030, TT2039WDM, TR2030WDM

Dimensions / Hookup:

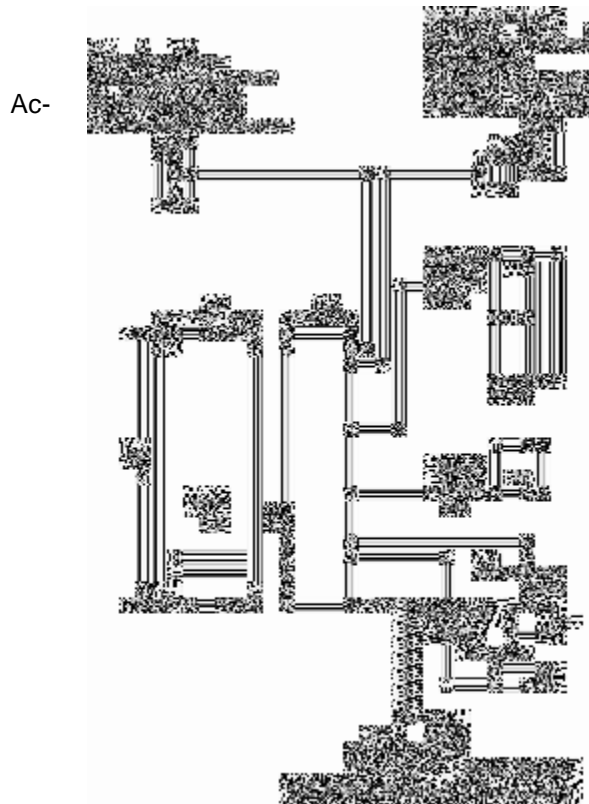

PH: (951) 371-1730 • FAX (951) 371-2592 • 255

Glider Circle, Corona CA 92880