
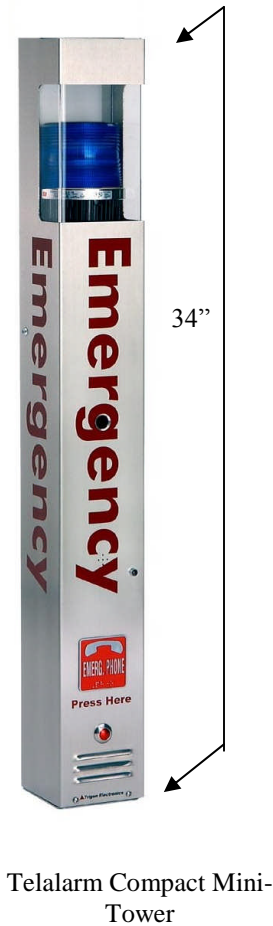


Telalarm Mini-Tower/Compact Mini-Tower

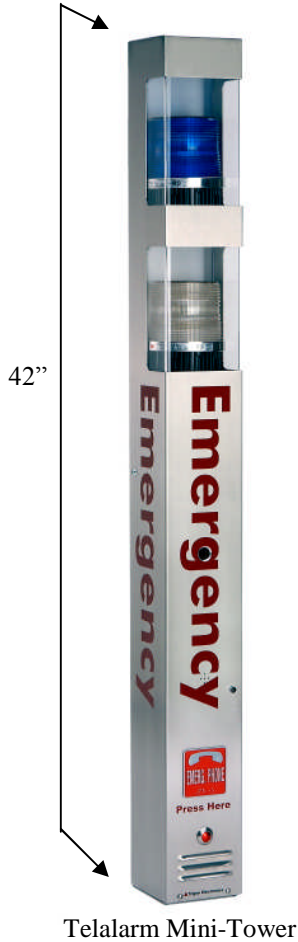

The Telalarm Mini-Tower tower series was developed for use on college campuses and hospital sites. It has become one of our most popular towers to date at many universities across the United States. The tower is available with an area light or with a combination blue light/strobe in the compact version. The Compact Mini-Tower works especially well in parking structures or any other low profile areas.

- #316 non-rusting Stainless Steel
- 10-number rollover auto-dialing
- (1) form C dry contact relay for controlling optional internal camera
- ADA compliant "call progress" lamp
- Optional camera placed in the "g" in Emergency (shown above)
- Large EMERGENCY decal
- Optional Braille Emergency Plate
- Can be made with a Two-Button option
- Compact Mini-Tower has combination blue light/strobe
- Public address calls can be made by the remote attendant
- Calls can ONLY be terminated by the remote attendant for increased security

255 GLIDER CIRCLE
CORONA, CA 92880
PHONE : (951) 371-1730
FAX: (951) 371-2592



www.TrigonElectronics.com

Telalarm HF-2 MiniTower / Compact Mini-Tower

Specifications

- Design** - Handsfree speaker telephone. Single button operation.
- Capacity** - Up to 10 numbers, each up to 16 digits in length.
- Response Assurance** - Unit cannot be disabled by pressing call button after Emergency Mode operation sequence is started. Only remote attendant can terminate call.
- Site ID** - Programmable 4 digit code.
- Programming** - Remote via touch-tone telephone.
- Power** - 100VA 1 phase 60hz, transformer included.
- Output Ratings** -
Power Relays: 5 AMPS @ 12VDC or 1 AMP @ 110VAC
- Output Duration** - Duration of call.
- Inputs** - Push-for-help button.
- Telephone Line** - Standard touch-tone or rotary. Dedicated or extension line.
- Mounting** - Surface.
- Construction** -
- Noncorroding #316 Stainless Steel.
 - Tough carbon fiber speaker.
 - Unidirectional microphone in an acoustical chamber.
 - Braille ADA compliant plate.
- Operating Temperature** - -5° F to +120° F

Options


- High Visibility** - Large red button and heavy duty switch
- Camera** - Black & White, Color or Wide Angle, low light.
- Two Button** - Allows one button for emergency calls and a second button for information calls.
- Available Celular Wireless** - Allows tower to be placed in areas where traditional telephone lines cannot be used.
- Voice Location Identifier module** - Allows an audible confirmation of the units location.

Accessories

- Line Filter** - Suppresses RFI/EMI from input power line.
- DECODER III** - Desktop device decodes and displays Site ID information.
- Consolidator** - Call routing and switching system. Allows multiple HF-2 units to operate with few, or with no, outside lines.
- Fiber Optic Compatible**
International Fiber Systems model #s;
TT 2010, TR 2010, TT 2010WDM, TR 2010WDM,
TT 2030, TR 2030, TT 2030WDM, TR 2030WDM

Dimensions/ hookup

Mounting

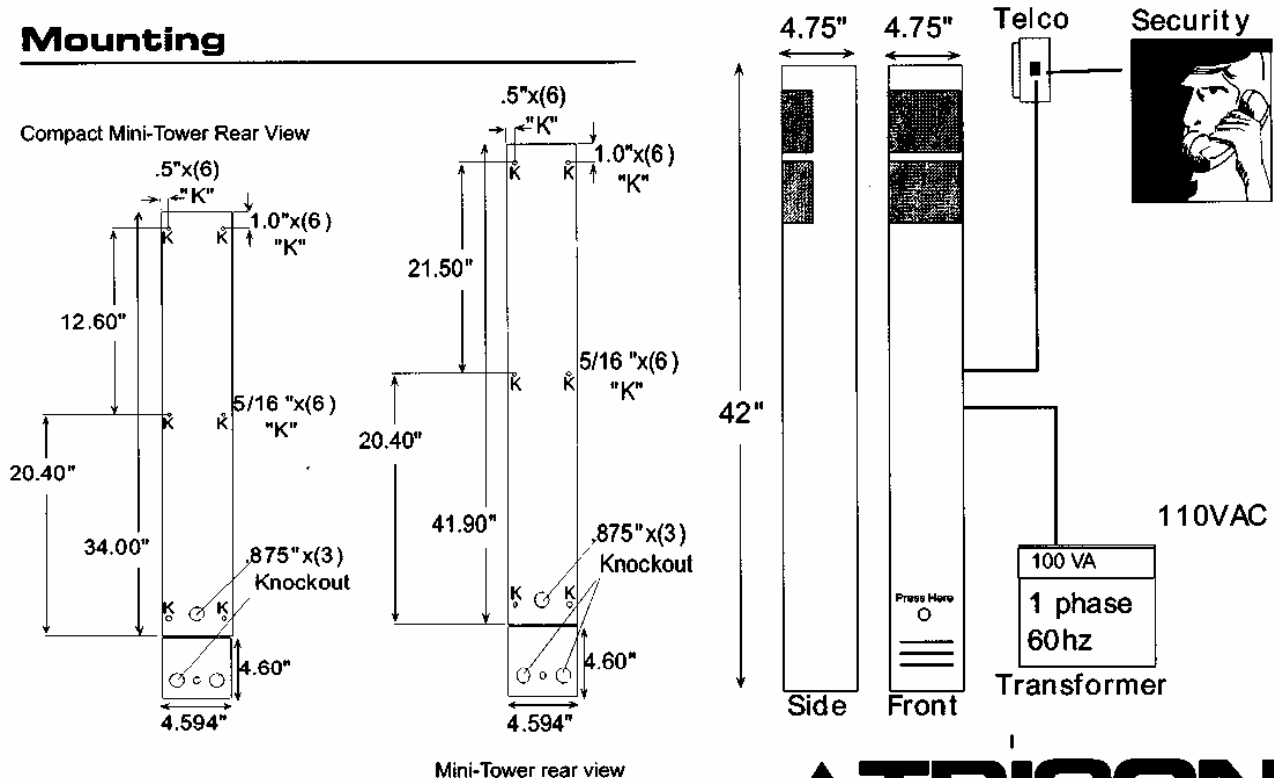

TRIGON
ELECTRONICS, INC.

800/ 842-7444 • Phone 951/ 371-1730 • Fax 951/ 371-2592 • 255 Glider Circle, Corona, California 92880